
















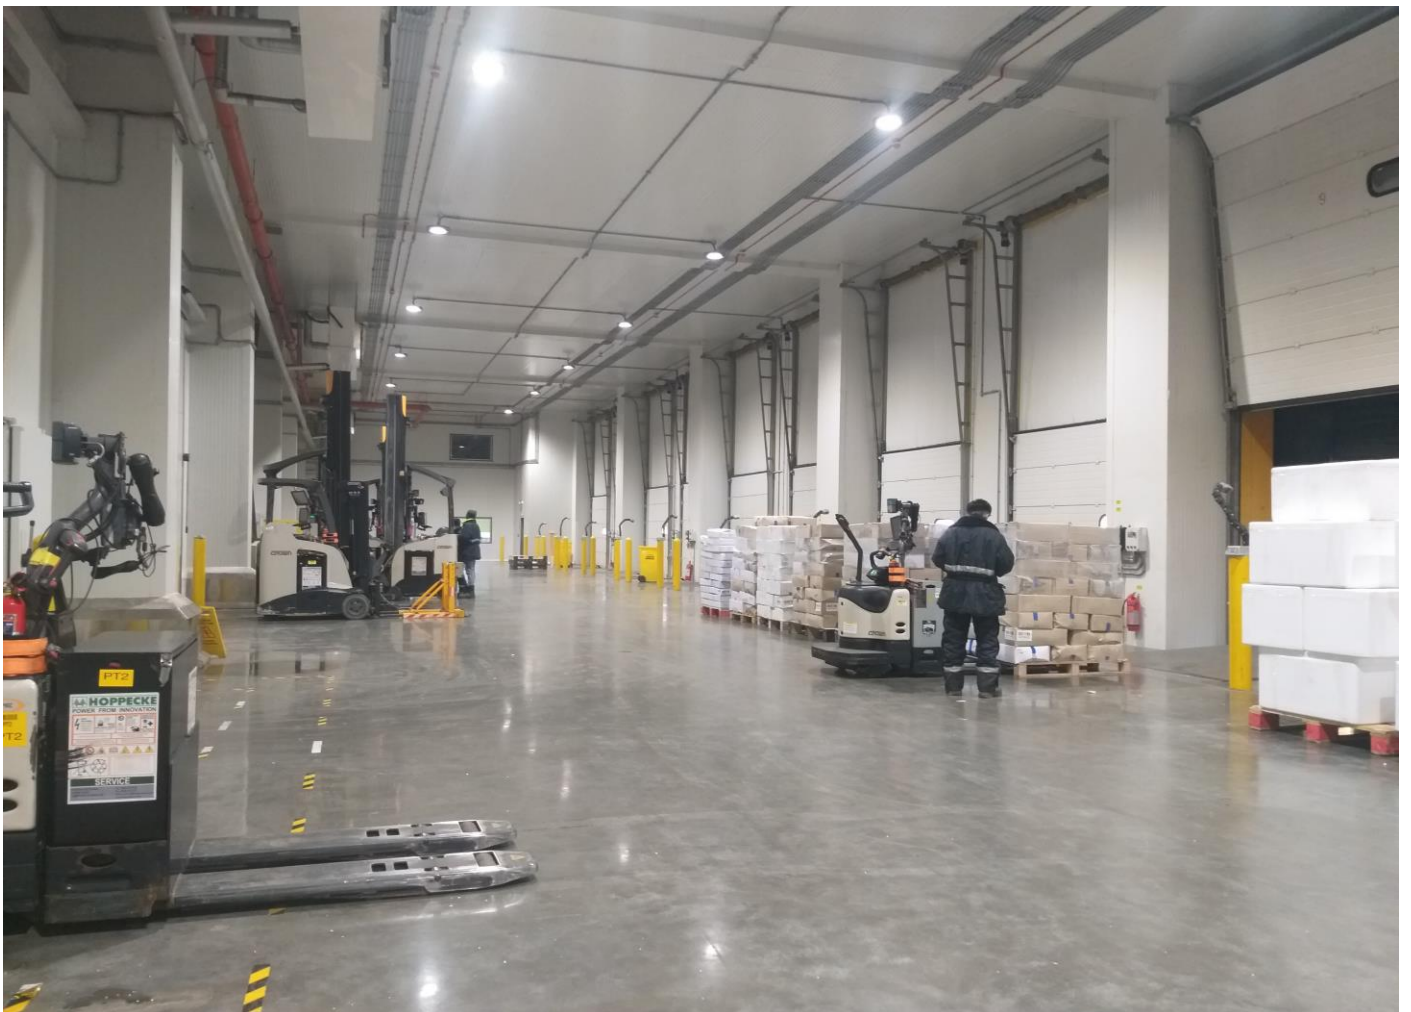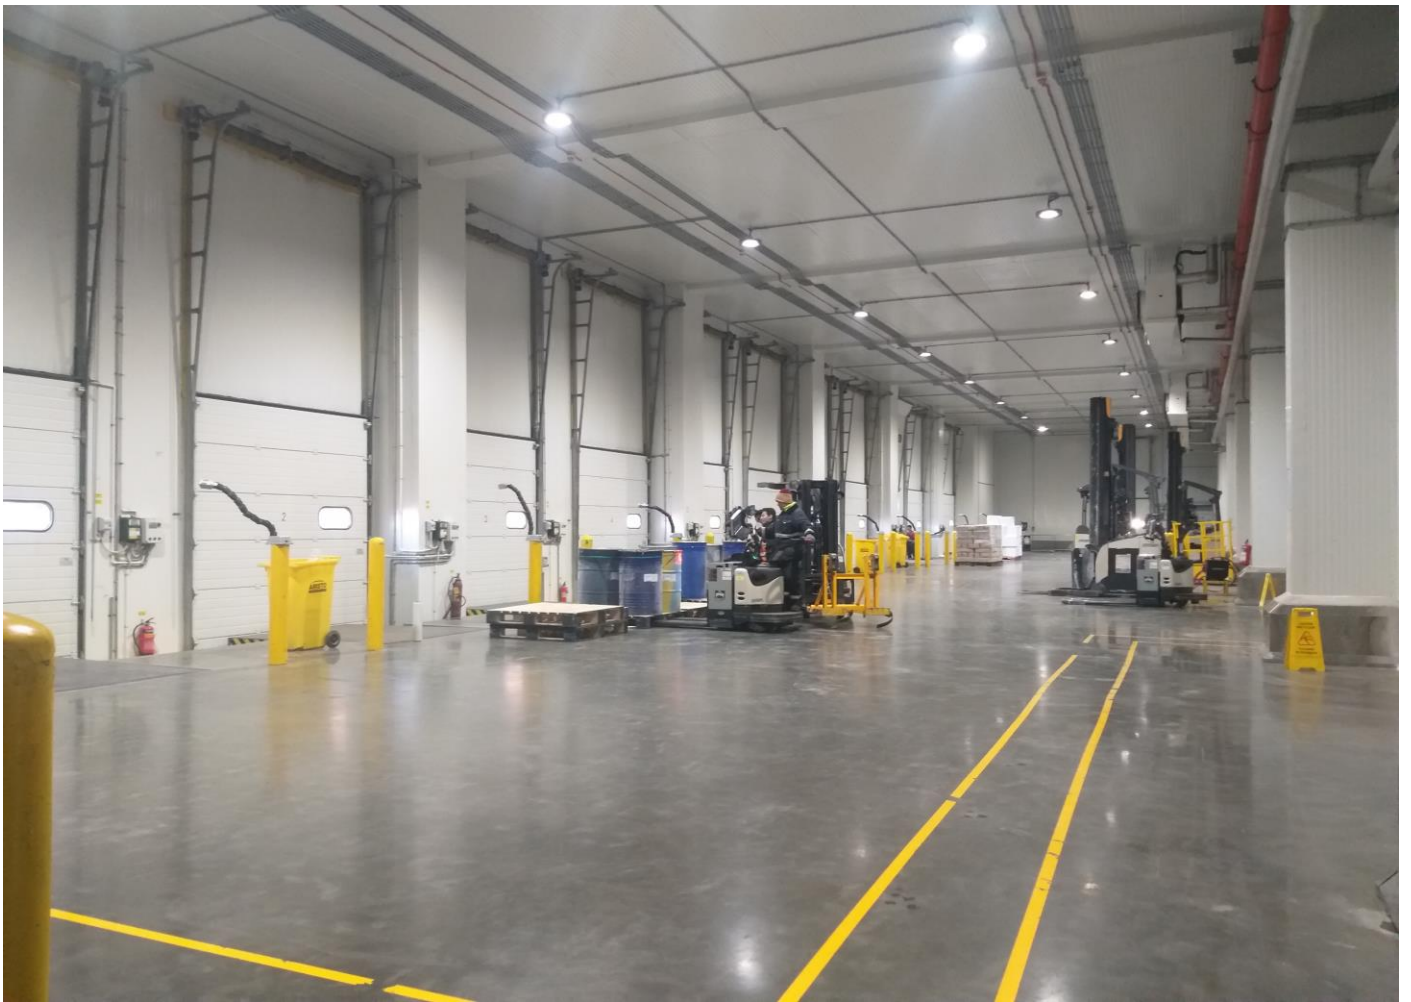







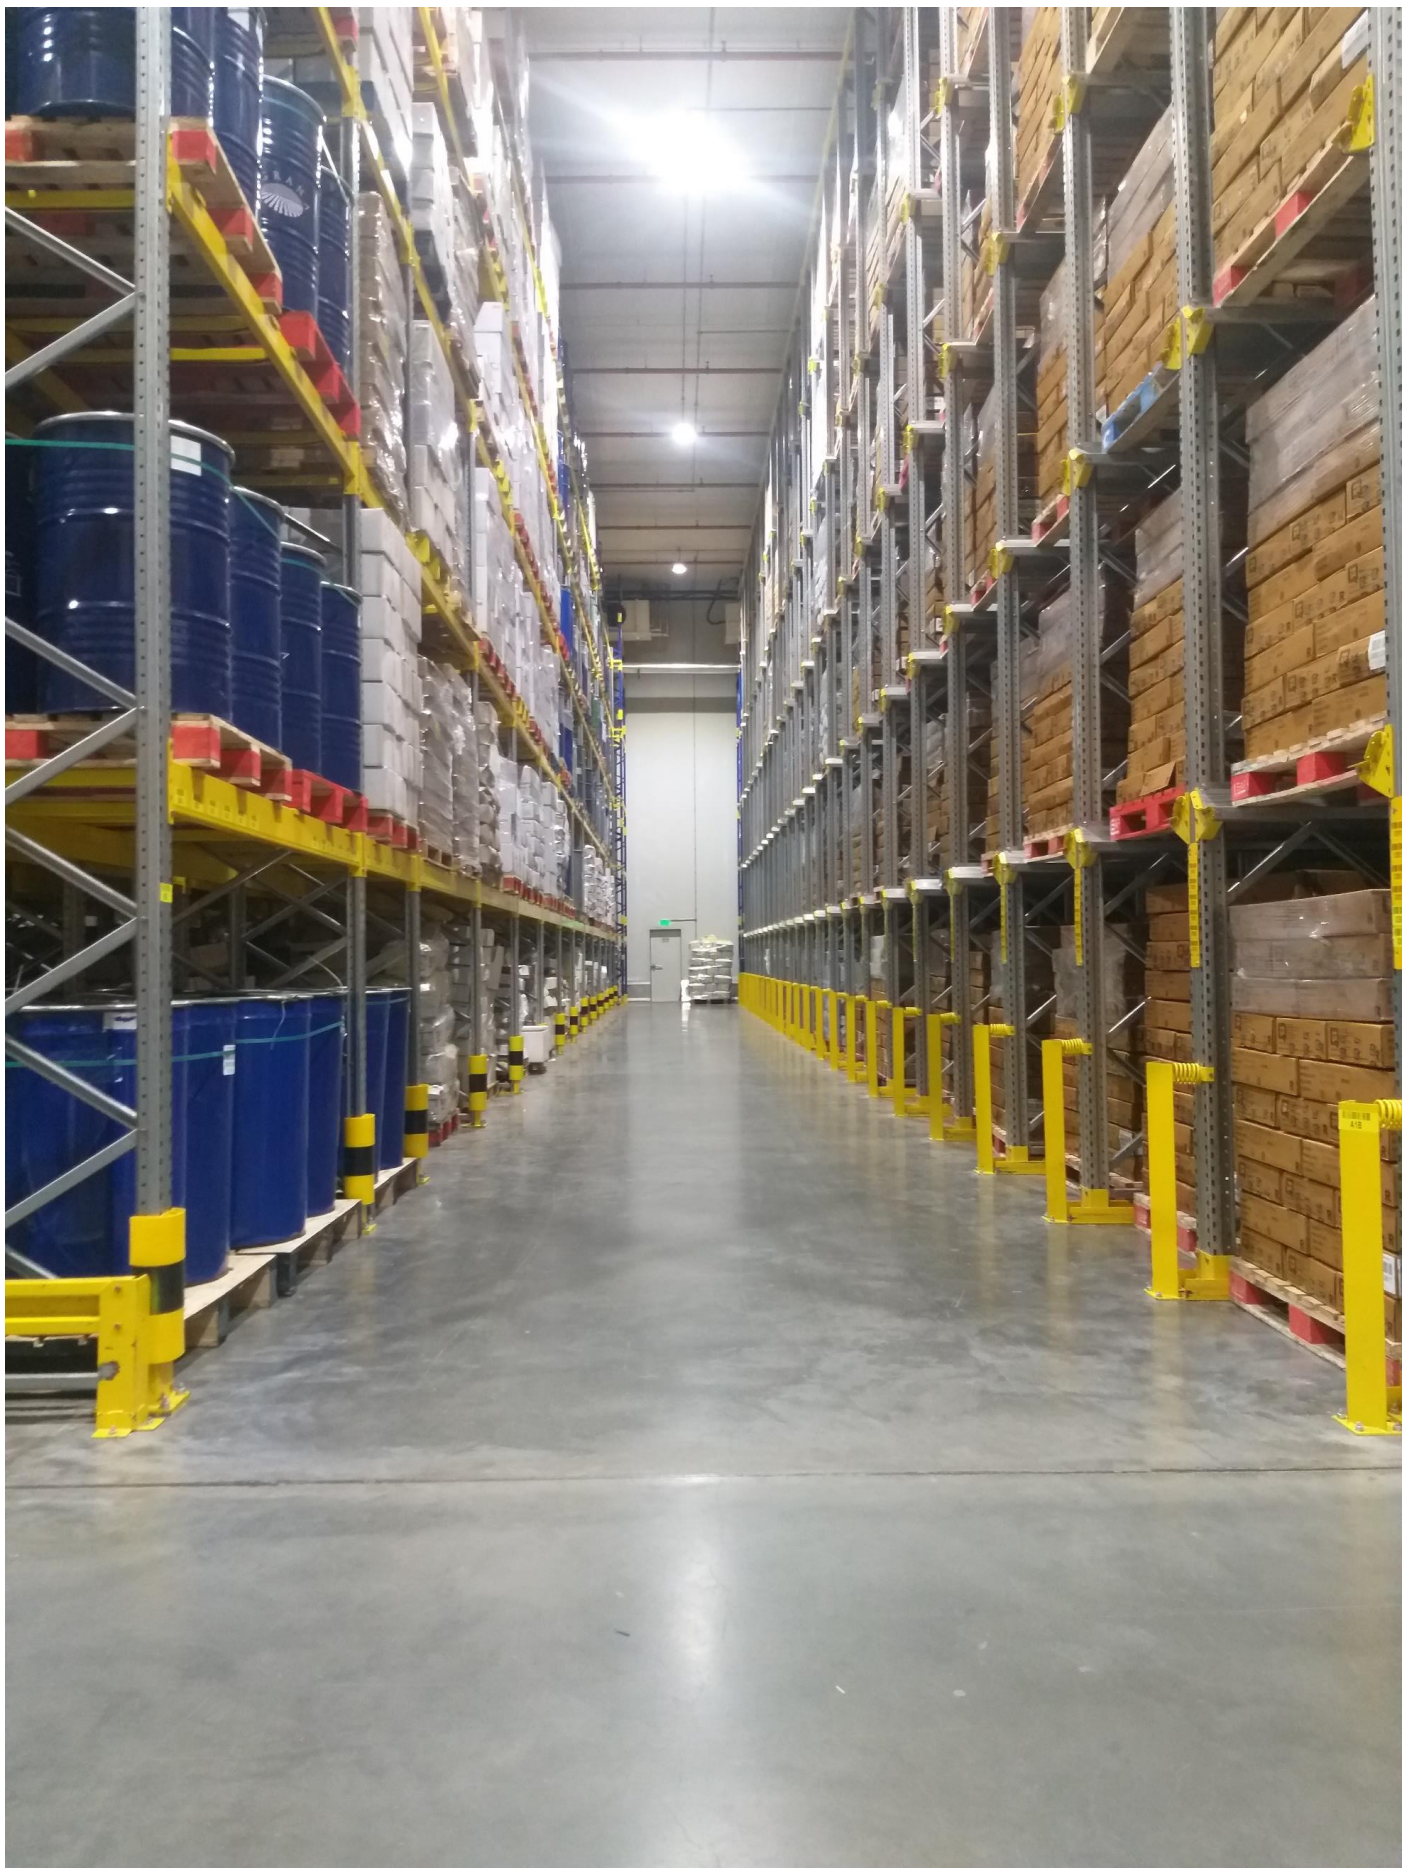












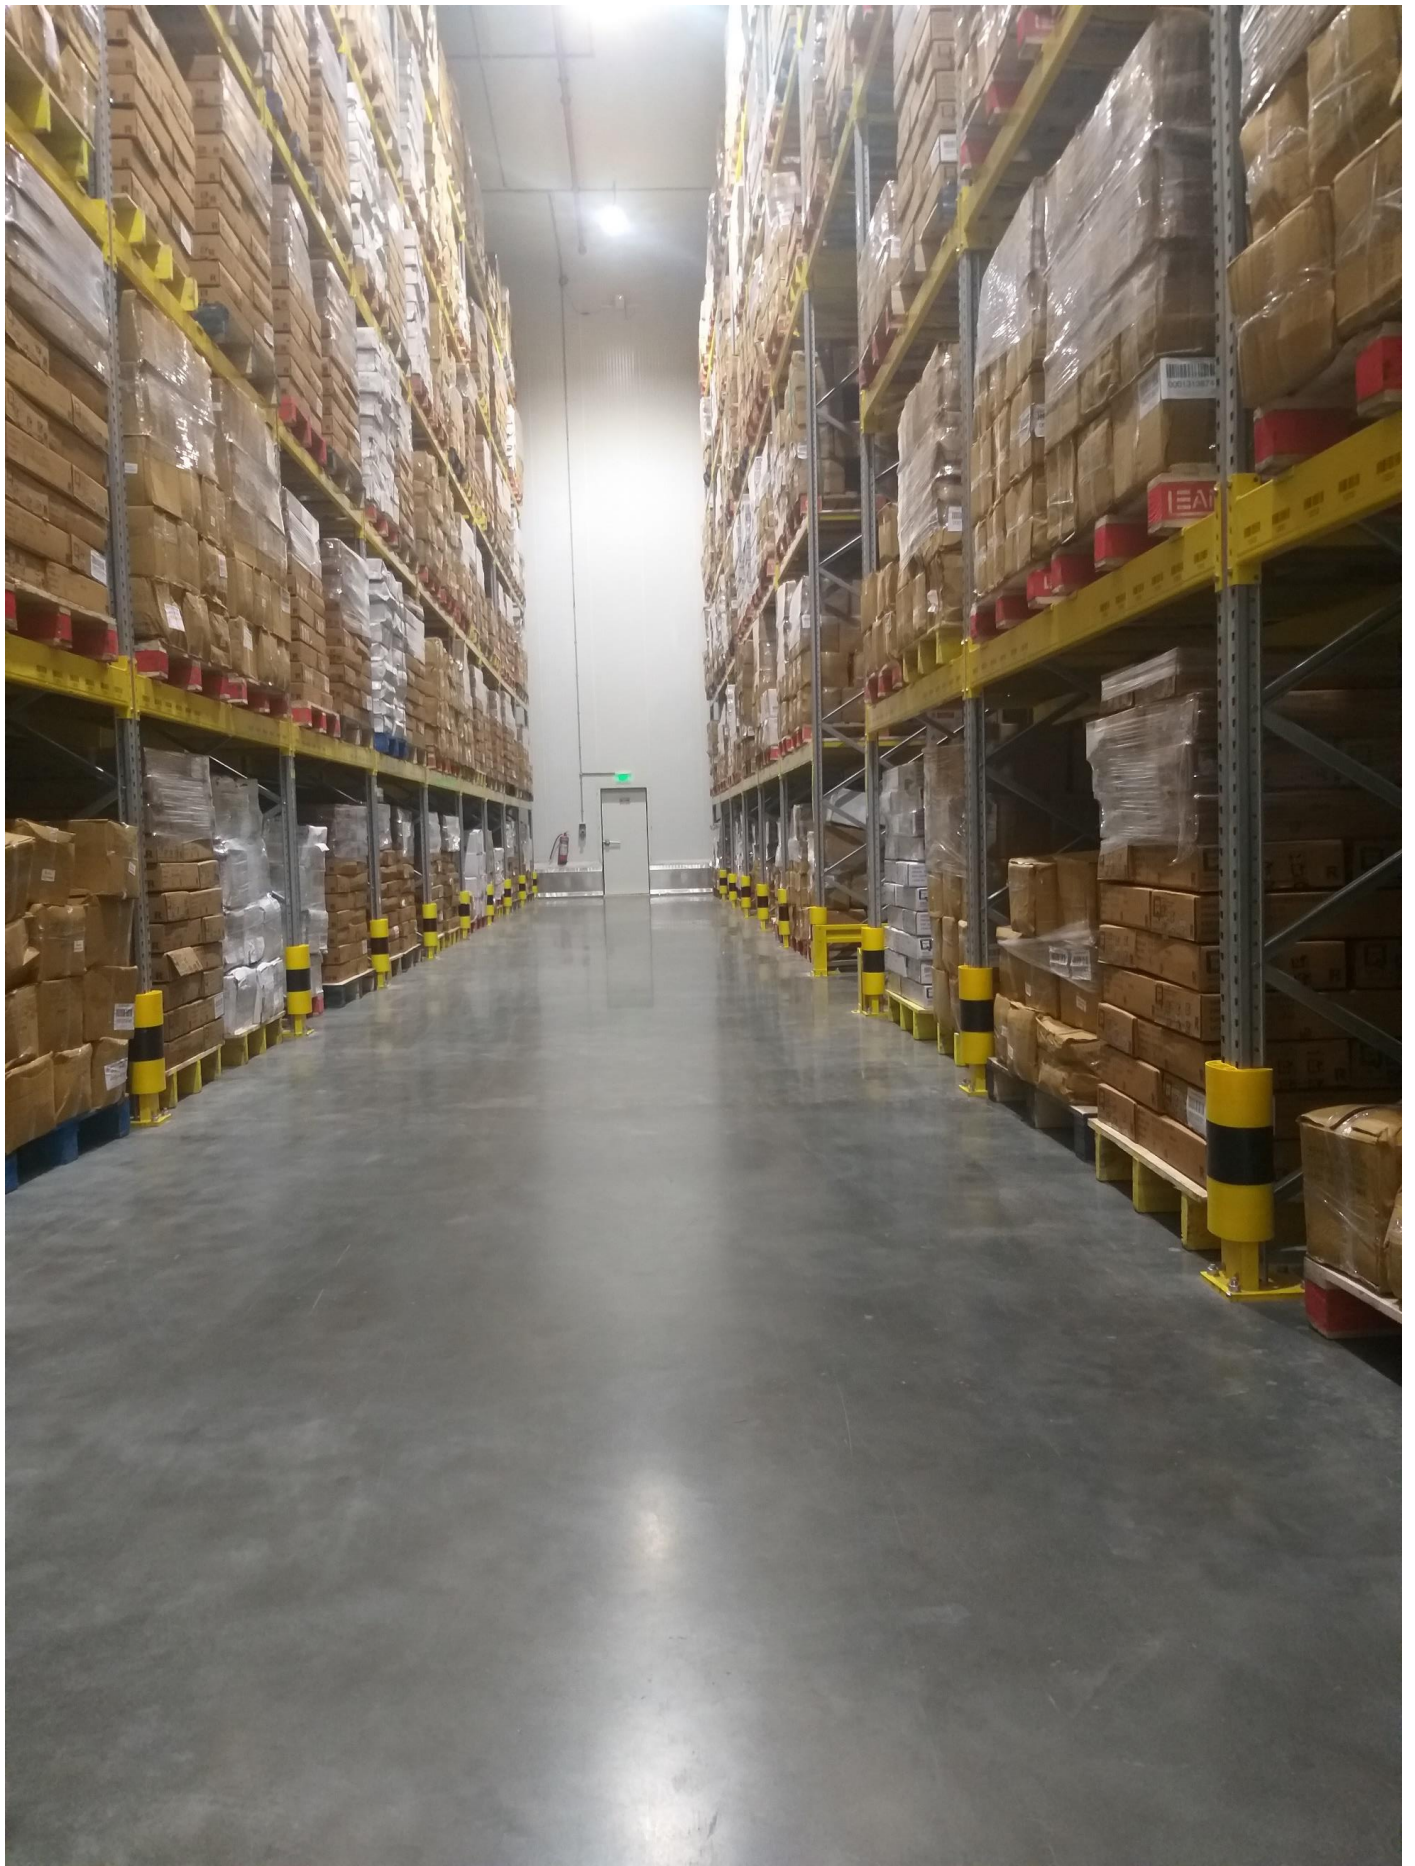



SCHAFER
Pallet Racking Load Notice

9045
7245
1800
1845

Beam Height	Beam Span	Max. Load
9045	12000mm	12000KG
9045	12000mm	12000KG
9045	12000mm	12000KG
7245	12000mm	12000KG
7245	12000mm	12000KG
7245	12000mm	12000KG
1800	12000mm	12000KG
1800	12000mm	12000KG
1800	12000mm	12000KG
1845	12000mm	12000KG
1845	12000mm	12000KG
1845	12000mm	12000KG

12000KG
MAXIMUM BAY LOAD
ALL LOADS TO BE UNIFORMLY DISTRIBUTED

1. RACKING SHALL BE USED WITHIN THE DESIGNATED LOAD CAPACITY.
2. LOADS SHALL BE UNIFORMLY DISTRIBUTED.
3. LOADS SHALL BE PLACED ON THE BEAMS.
4. LOADS SHALL NOT BE PLACED ON THE FLOOR.
5. LOADS SHALL NOT BE PLACED ON THE WALLS.
6. LOADS SHALL NOT BE PLACED ON THE CEILING.
7. LOADS SHALL NOT BE PLACED ON THE ROOF.
8. LOADS SHALL NOT BE PLACED ON THE GROUND.
9. LOADS SHALL NOT BE PLACED ON THE CURB.
10. LOADS SHALL NOT BE PLACED ON THE SIDEWALK.
11. LOADS SHALL NOT BE PLACED ON THE STREET.
12. LOADS SHALL NOT BE PLACED ON THE HIGHWAY.
13. LOADS SHALL NOT BE PLACED ON THE AIRPORT.
14. LOADS SHALL NOT BE PLACED ON THE RAILROAD.
15. LOADS SHALL NOT BE PLACED ON THE BRIDGE.
16. LOADS SHALL NOT BE PLACED ON THE TUNNEL.
17. LOADS SHALL NOT BE PLACED ON THE UNDERPASS.
18. LOADS SHALL NOT BE PLACED ON THE OVERPASS.
19. LOADS SHALL NOT BE PLACED ON THE VIADUCT.
20. LOADS SHALL NOT BE PLACED ON THE CULVERT.









